

# ET 7272 TSSOP20


## PACKAGE SPECIFICATION



Rev A1, Page 1/1

### ORDERING INFORMATION

Type	Package	Options	Order Designation
ET7272	TSSOP20	none	ET7272 TSSOP20




TSSOP20

### PIN CONFIGURATION

### PIN FUNCTIONS

Top view

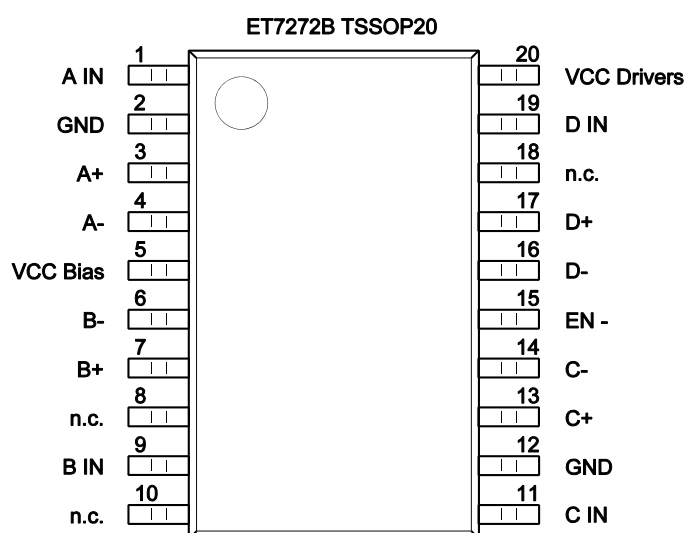

No	Name	Function
1	A IN	input A
2	GND	ground
3	A+	output A
4	A-	inverted output A
5	VCC Bias	bias supply voltage
6	B-	inverted output B
7	B+	output B
8	n.c.	-
9	B IN	input B
10	n.c.	-
11	C IN	input C
12	GND	ground
13	C+	noninverted output C
14	C-	inverted output C
15	EN-	not enable input
16	D -	inverted output D
17	D+	output D
18	nc	-
19	D IN	input D
20	VCC Drivers	driver supply voltage

nc: not connected

### ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Parameter	Conditions	Fig.	Min.	Typ.	Max.	Unit
TG1	Ta	Operating Ambient Temperature Range			-55		115	°C
TG2	Ts	Storage Temperature Range			-55		150	°C
TG3	Tl	Lead Temperature	soldering, 10 sec				260	°C

© 2005