

iC-OC CDIP16


PACKAGE SPECIFICATION SAMPLES



Rev A0, Page 1/1

ORDERING INFORMATION


Type	Package	Options	Order Designation
iC-OR	Cer DIP16	none	iC-OR CDIP16



package available for engineering samples only

PIN CONFIGURATION

(top view)

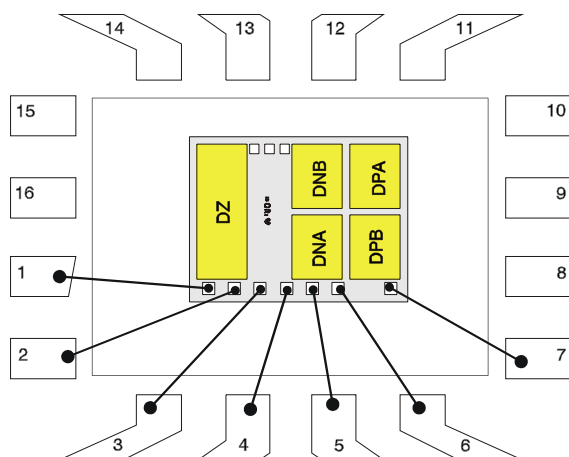

PIN FUNCTIONS

No.	Name	Function
1	AGND	Ground
2	DNA	Diode DNA
3	DPA	Diode DPA
4	DNB	Diode DNB
5	DPB	Diode DPB
6	DZ	Diode DZ
7	AGND	Ground
8	n.c.	
9	n.c.	
10	n.c.	
11	n.c.	
12	n.c.	
13	n.c.	
14	n.c.	
15	n.c.	
16	n.c.	

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Parameter	Conditions	Fig.				Unit
					Min.	Typ.	Max.	
TG1	Ta	Operating Ambient Temperature Range			0		85	°C
TG2	Ts	Storage Temperature Range			-30		110	°C
TG3	Tl	Lead Temperature	soldering, 10 sec				260	°C

© 2001